


60 Hz seçim aralığı: Q= 72 m ³ /sa - 132 m ³ /sa	
Standart Klepe Çıkışı : NPT - Rp 5	
Fan tipi: Semiaksiyel	
Dönüş : Saat Yönü Ters	
Bağlantı : NEMA Standardına uygun	
Mil Çapı : 25 mm	
Minimum sıvı seviyesi: Emiş süzgecinin altından itibaren 1200 mm.	
Maksimum pompa dış çapı (Kablo muhafazası ile birlikte): 182 mm	
Pompalanan Sıvı: Kimyasal ve mekanik aşındırıcı olmayan akışkan.	
İzin verilen maksimum kum miktarı = 50 g/m ³	
İzin verilen katı parçacık ölçüsü: Max 2mm	
İmalat ve güvenlik standartları:	Tarih
TS 11146:1993	10 / 2012
TS EN 809:2000 98/37/EC	REV. 0
TS EN ISO 12100-1:2007	TS EN ISO 12100-2:2006

Operating range at 60 Hz: Q= 72 m ³ /h - 132 m ³ /h	
Standard Outlet : NPT - Rp 5	
Impeller type: Mixed flow	
Rotation : CCW	
Connection : According to NEMA Standard	
Shaft Diameter : 25 mm	
Minimum liquid level (NPSH) : 1200 mm from bottom of suction grid	
Maximum pump (Wet end) diameter - (Including cable guard): 182 mm	
Liquid being pumped: Chemically and mechanically non aggressive.	
Maximum allowable solid quantity = 50 g/m ³	
Solid dimension: Max 2mm	
Construction and safety standards:	Date
TS 11146:1993	10 / 2012
TS EN 809:2000 98/37/EC	REV. 0
TS EN ISO 12100-1:2007	TS EN ISO 12100-2:2006

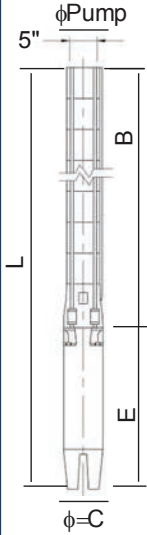

POMPA TİPİ PUMP TYPE	MOTOR MOTEUR			ÖLÇÜLER / DIMENSIONS (mm)										AĞIRLIK / WEIGHT (kg)						
	6" HP	8" HP	kW	8"-6"	8"-8"	6"	8"	8"-6"	8"-8"	6"	8"	8"-6"	8"-8"	ø D	MOTOR		POMPA PUMP		TOPLAM TOTAL	
				L	L	E	E	B	B	ø = C	ø = C	ø PUMP	ø PUMP		6"	8"	8"-6"	8"-8"	8"-6"	8"-8"
SS 877/01	7,5	-	5,5	1200	-	630	-	570	-	145	-	174	-	5"	46	-	22	-	68	-
SS 877/02	15	-	11	1428	-	730	-	698	-	145	-	174	-	5"	56	-	25	-	81	-
SS 877/03	25	-	18,5	1706	-	880	-	826	-	145	-	174	-	5"	72	-	29	-	101	-
SS 877/04	30	30	22	1934	1895	980	930	954	965	145	195	174	182	5"	82	121	32	32	114	153
SS 877/05	35	35	26	2112	2133	1030	1040	1082	1093	145	195	174	182	5"	88	140	35	36	123	176
SS 877/06	50	50	37	2400	2291	1190	1070	1210	1221	145	195	174	182	5"	106	146	39	40	145	186
SS 877/07	50	50	37	2528	2419	1190	1070	1338	1349	145	195	174	182	5"	106	146	42	44	148	190
SS 877/08	60	60	45	2736	2607	1270	1130	1466	1477	145	195	174	182	5"	116	158	45	48	161	206
SS 877/09	-	70	52	-	2815	-	1210	-	1605	-	195	-	182	5"	-	177	-	52	-	229
SS 877/10	-	75	55	-	2983	-	1250	-	1733	-	195	-	182	5"	-	184	-	55	-	239
SS 877/11	-	80	59	-	3141	-	1280	-	1861	-	195	-	182	5"	-	190	-	59	-	249
SS 877/12	-	90	66	-	3354	-	1365	-	1989	-	195	-	182	5"	-	204	-	63	-	267
SS 877/13	-	100	75	-	3547	-	1430	-	2117	-	195	-	182	5"	-	218	-	67	-	285
SS 877/14	-	100	75	-	3675	-	1430	-	2245	-	195	-	182	5"	-	218	-	71	-	289
SS 877/15	-	110	81	-	3873	-	1500	-	2373	-	195	-	182	5"	-	230	-	75	-	305

POMPA TİPİ PUMP TYPE	MOTOR MOTEUR			m ³ /h	0	72	78	84	90	96	102	108	114	120	126	132	
	6" HP	8" HP	kW		l / min	0	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200
					gpm	0	317	343	370	396	423	449	476	502	528	555	581
SS 877/01	7,5	-	5,5	Basma Yüksekliği (m) Total Dynamic Head (m)	25	20	19	19	18	17	16	15	14	13	12	11	
SS 877/02	15	-	11		49	40	39	38	36	34	32	30	28	25	24	21	
SS 877/03	25	-	18,5		74	60	58	57	54	51	48	45	42	38	35	32	
SS 877/04	30	30	22		99	80	77	76	71	68	64	61	55	50	47	42	
SS 877/05	35	35	26		124	100	97	95	89	85	80	76	69	63	59	53	
SS 877/06	50	50	37		148	120	116	114	107	102	96	91	83	76	71	63	
SS 877/07	50	50	37		173	140	136	133	125	119	112	106	97	88	82	74	
SS 877/08	60	60	45		198	160	155	152	143	136	128	121	111	101	94	84	
SS 877/09	-	70	52		222	179	174	171	161	153	144	136	125	113	106	95	
SS 877/10	-	75	55		247	199	194	190	179	170	161	151	138	126	118	105	
SS 877/11	-	80	59		272	219	213	208	196	187	177	167	152	139	129	116	
SS 877/12	-	90	66		297	239	232	227	214	204	193	182	166	151	141	127	
SS 877/13	-	100	75		321	259	252	246	232	222	209	197	180	164	153	137	
SS 877/14	-	100	75		346	279	271	265	250	239	225	212	194	177	165	148	
SS 877/15	-	110	81		371	299	290	284	268	256	241	227	208	189	176	158	

Performans eğrileri Performance Curves 1 – 15

