

60 Hz seçim aralığı: Q= 18 m³/sa - 48 m³/sa
Standart Klepe Çıkışı : NPT - Rp 3
Fan tipi: Semiaksiyel
Dönüş : Saat Yönü Ters
Bağlantı : NEMA Standardına uygun
Mil Çapı : 22 mm

Minimum sıvı seviyesi: Emiş süzgecinin altından itibaren 800 mm.
Maksimum pompa dış çapı (Kablo muhafazası ile birlikte): 133 mm

Pompanılan Sıvı: Kimyasal ve mekanik aşındırıcı olmayan akışkan.
İzin verilen maksimum kum miktarı = 50 g/m³
İzin verilen katı parçacık ölçüsü: Max 2mm

İmalat ve güvenlik standartları:

TS 11146:1993 TS EN 809:2000 98/37/EC
TS EN ISO 12100-1:2007 TS EN ISO 12100-2:2006

Tarih

10 / 2012
REV. | 0

Operating range at 60 Hz: Q= 18 m³/h - 48 m³/h
Standard Outlet : NPT - Rp 3
Impeller type: Mixed flow
Rotation : CCW
Connection : According to NEMA Standard
Shaft Diameter : 22 mm

Minimum liquid level (NPSH) : 800 mm from bottom of suction grid
Maximum pump (Wet end) diameter - (Including cable guard): 133 mm


Liquid being pumped: Chemically and mechanically non aggressive.
Maximum allowable solid quantity = 50 g/m³
Solid dimension: Max 2mm

Construction and safety standards:

TS 11146:1993 TS EN 809:2000 98/37/EC
TS EN ISO 12100-1:2007 TS EN ISO 12100-2:2006

Date

10 / 2012
REV. | 0

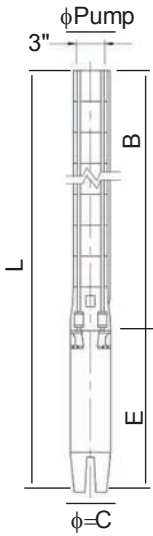

POMPA TİPİ PUMP TYPE	MOTOR MOTEUR			ÖLÇÜLER / DIMENSIONS (mm)												AĞIRLIK / WEIGHT (kg)											
	4" HP	6" HP	8" HP	kW	6"-4"		6"-6"		6"-8"		4"		6"		8"		Ø PUMP	Ø D	MOTOR			POMPA PUMP			TOPLAM TOTAL		
					L	L	L	E	E	E	B	B	B	Ø C	Ø C	Ø C			4"	6"	8"	6"-4"	6"-6"	6"-8"	6"-4"	6"-6"	6"-8"
SS 630/01	1,5	-	-	1,1	789	-	-	425	-	-	364	-	-	93	-	-	133	3"	10	-	-	7	-	-	17	-	-
SS 630/02	3	-	-	2,2	952	-	-	492	-	-	460	-	-	93	-	-	133	3"	14	-	-	8	-	-	22	-	-
SS 630/03	5,5	5,5	-	4	1177	1186	-	621	630	-	556	556	-	93	145	-	133	3"	21	46	-	10	13	-	31	59	-
SS 630/04	7,5	7,5	-	5,5	1392	1282	-	740	630	-	652	652	-	93	145	-	133	3"	25	46	-	12	15	-	37	61	-
SS 630/05	7,5	7,5	-	5,5	1608	1398	-	860	650	-	748	748	-	93	145	-	133	3"	31	48	-	14	16	-	45	64	-
SS 630/06	10	10	-	7,5	1704	1494	-	860	650	-	844	844	-	93	145	-	133	3"	31	48	-	16	18	-	47	66	-
SS 630/07	-	12,5	-	9,2	-	1630	-	-	690	-	940	-	-	145	-	-	133	3"	-	50	-	-	19	-	-	69	-
SS 630/08	-	12,5	-	9,2	-	1766	-	-	730	-	1036	-	-	145	-	-	133	3"	-	56	-	-	21	-	-	77	-
SS 630/09	-	15	-	11	-	1912	-	-	780	-	1132	-	-	145	-	-	133	3"	-	60	-	-	22	-	-	82	-
SS 630/10	-	17,5	-	13	-	2008	-	-	780	-	1228	-	-	145	-	-	133	3"	-	60	-	-	24	-	-	84	-
SS 630/11	-	17,5	-	13	-	2154	-	-	830	-	1324	-	-	145	-	-	133	3"	-	66	-	-	25	-	-	91	-
SS 630/12	-	20	-	15	-	2250	-	-	830	-	1420	-	-	145	-	-	133	3"	-	66	-	-	27	-	-	93	-
SS 630/13	-	20	-	15	-	2396	-	-	880	-	1516	-	-	145	-	-	133	3"	-	72	-	-	28	-	-	100	-
SS 630/14	-	25	-	18,5	-	2492	-	-	880	-	1612	-	-	145	-	-	133	3"	-	72	-	-	30	-	-	102	-
SS 630/15	-	25	-	18,5	-	2688	-	-	980	-	1708	-	-	145	-	-	133	3"	-	82	-	-	31	-	-	113	-
SS 630/16	-	25	-	18,5	-	2784	-	-	980	-	1804	-	-	145	-	-	133	3"	-	82	-	-	33	-	-	115	-
SS 630/17	-	30	30	22	-	2880	2875	-	980	930	-	1900	1945	-	145	195	133	3"	-	82	121	-	34	38	-	116	159
SS 630/18	-	30	30	22	-	2976	2971	-	980	930	-	1996	2041	-	145	195	133	3"	-	82	121	-	36	39	-	118	160
SS 630/19	-	30	30	22	-	3072	3067	-	980	930	-	2092	2137	-	145	195	133	3"	-	82	121	-	37	41	-	119	162
SS 630/20	-	30	30	22	-	3168	3163	-	980	930	-	2188	2233	-	145	195	133	3"	-	82	121	-	39	42	-	121	163
SS 630/21	-	35	35	26	-	3330	3369	-	1030	1040	-	2300	2329	-	145	195	133	3"	-	88	140	-	41	44	-	129	184
SS 630/22	-	35	35	26	-	3426	3465	-	1030	1040	-	2396	2425	-	145	195	133	3"	-	88	140	-	42	45	-	130	185
SS 630/23	-	40	40	30	-	3602	3561	-	1110	1040	-	2492	2521	-	145	195	133	3"	-	98	140	-	44	47	-	142	187
SS 630/24	-	40	40	30	-	3698	3657	-	1110	1040	-	2588	2617	-	145	195	133	3"	-	98	140	-	45	48	-	143	188
SS 630/25	-	40	40	30	-	3794	3753	-	1110	1040	-	2684	2713	-	145	195	133	3"	-	98	140	-	47	50	-	145	190
SS 630/26	-	40	40	30	-	3890	3849	-	1110	1040	-	2780	2809	-	145	195	133	3"	-	98	140	-	48	51	-	146	191
SS 630/27	-	50	50	37	-	4066	3975	-	1190	1070	-	2876	2905	-	145	195	133	3"	-	106	146	-	50	53	-	156	199
SS 630/28	-	50	50	37	-	4162	4071	-	1190	1070	-	2972	3001	-	145	195	133	3"	-	106	146	-	51	54	-	157	200
SS 630/29	-	50	50	37	-	4258	4167	-	1190	1070	-	3068	3097	-	145	195	133	3"	-	106	146	-	53	56	-	159	202
SS 630/30	-	50	50	37	-	4354	4263	-	1190	1070	-	3164	3193	-	145	195	133	3"	-	106	146	-	54	57	-	160	203
SS 630/31	-	50	50	37	-	4450	4359	-	1190	1070	-	3260	3289	-	145	195	133	3"	-	106	146	-	56	59	-	162	205
SS 630/32	-	50	50	37	-	4546	4455	-	1190	1070	-	3356	3385	-	145	195	133	3"	-	106	146	-	57	60	-	163	206
SS 630/33	-	60	60	45	-	4722	4611	-	1270	1130	-	3452	3481	-	145	195	133	3"	-	116	158	-	59	62	-	175	220

POMPA TİPİ PUMP TYPE	MOTOR MOTEUR			kW	m ³ /h														
	4" HP	6" HP	8" HP		l / min														
					0	22	24	26	28	30	32	34	36	38	40	42	48		
SS 630/01	1,5	-	-	1,1	17	13	13	13	12	12	11	11	10	10	9	8	6		
SS 630/02	3	-	-	2,2	34	27	26	25	24	23	22	21	19	18	17	13			
SS 630/03	5,5	5,5	-	4	51	40	39	38	37	36	34	33	31	29	27	19			
SS 630/04	7,5	7,5	-	5,5	67	53	52	51	49	48	46	44	41	38	37	25			
SS 630/05	7,5	7,5	-	5,5	84	66	65	63	62	60	57	55	51	48	46	32			
SS 630/06	10	10	-	7,5	101	80	78	76	74	71	69	66	62	58	55	38			
SS 630/07	-	12,5	-	9,2	118	93	91	89	86	83	80	77	72	67	64	44			
SS 630/08	-	12,5	-	9,2	135	106	104	101	99	95	92	88	82	77	73	50			
SS 630/09	-	15	-	11	152	120	117	114	111	107	103	99	92	86	82	57			
SS 630/10	-	17,5	-	13	168	133	130	127	123	119	115	110	103	96	91	63			
SS 630/11	-	17,5	-	13	185	146	143	139	135	131	126	121	113	106	100	69			
SS 630/12	-	20	-	15	202	160	156	152	148	143	138	132	123	115	110	76			
SS 630/13	-	20	-	15	219	173	169	165	160	155	149	143	133	125	119	82			
SS 630/14	-	25	-	18,5	236	186	182	177	172	167	160	154	144	134	128	88			
SS 630/15	-	25	-	18,5	253	199	195	190	185	179	172	165	154	144	137	95			
SS 630/16	-	25	-	18,5	270	213	208	203	197	191	183	176	164	154	146	101			
SS 630/17	-	30	30	22	286	226	221	215	209	202	195	187	174	163	155	107			
SS 630/18	-	30	30	22	303	239	234	228	222	214	206	198	185	173	164	113			
SS 630/19	-	30	30	22	320	253	247	241	234	226	218	209	195	182	174	120			
SS 630/20	-	30	30	22	337	266	260	253	246	238	229	220	205	192	183	126			
SS 630/21	-	35	35	26	354	279	273	266	259	250	241	231	215	202	192	132			
SS 630/22	-	35	35	26	371	293	286	278	271	262	252	242	226	211	201	139			
SS 630/23	-	40	40	30	387	306	299	291	283	274	264	253	236	221	210	145			
SS 630/24	-	40	40	30	404	319	312	304	296	286	275	264	246	230	219	151			
SS 630/25	-	40	40	30	421	332	325	316	308	298	287	275	256	240	228	158			
SS 630/26	-	40	40	30	438	346	338	329	320	310	298	286	267	250	237	164			
SS 630/27	-	50	50	37	455	359	351	342	333	322	310	297	277	259	247	170			
SS 630/28	-	50	50	37	472	372	364	354	345	333									

Performans eğrileri Performance Curves 1 – 33

